


Plexo™ mechanisms

controls and socket outlets IP 55

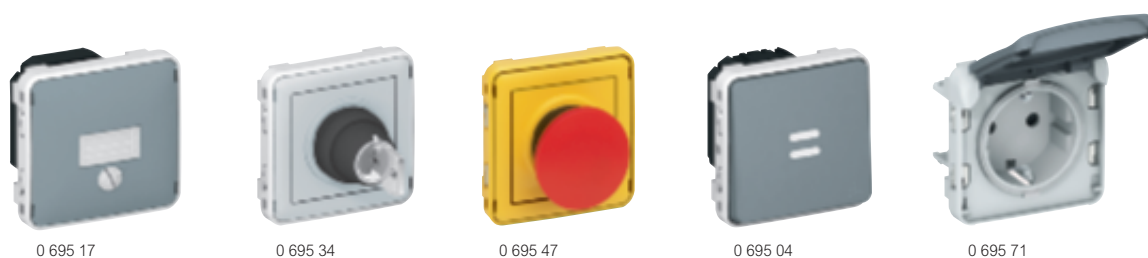

Mechanisms supplied with cover plate
Installation with surface-mounting boxes or flush-mounting support frames (p. 585)

Pack	Cat.Nos	Light sensitive switches, 230 V~	Pack	Cat.Nos	Illuminated time lag switches - 250 V~
5	0 695 17	Light sensitive switch 1 function Can be used to switch a lighting circuit "ON" and "OFF" based on light conditions (nightfall, daybreak) Supplied in one piece, including photoelectric cell Maximum load: - 1400 W incandescent and halogen lamps 230 V~ - 400 VA fluorescent tubes Luminosity threshold: 0,5 to 1500 lux IP 55 - IK 07 ● Grey	5 5	0 696 04 0 695 04	Illuminated time lag switches - 250 V~ Electronic time lag switch - IP 55 2-wire connection Supplied with lamp Temporization: 25 s to 15 min. Maximum loads: - 1000 W incandescent and halogen 230 V~ - 400 W halogen 130 V - 400 VA ELV halogen lamps - 400 VA fluorescent lamps - 2300 W resistive (heating) ○ White ● Grey
5	0 695 18	Photoelectric cell For use with modular light sensitive switches IP 55 ● Grey	10 10 5	0 696 39 0 695 71 0 707 22	German standard socket outlets 16 A - 250 V~ With earth lateral contact 2P+E screw terminals ○ White ● Grey ○ White antimicrobial
1	0 695 34	Key-operated switches 3 A - 250 V~ Supplied with RONIS key n° 455 Key removable in all position 2 N/O contacts 2 positions marked "0 - I" ● Grey	5	0 696 40 0 695 70	2P+E automatic terminals ○ White ● Grey
1	0 695 35	3 positions marked "I - 0 - II" ● Grey	10	0 695 85	British standard socket outlet 13 A - 250 V~ 2P+E screw terminals ● Grey
1	0 695 47	Emergency stop functions 3 A - 250 V~ Supplied with "emergency stop" label in 8 languages. Yellow cover plate, red button Emergency stop button - 1 N/C contact ● Grey/yellow	10 10 5	0 696 21 0 695 51 0 707 21	French standard socket outlets 16 A - 250 V~ 2P+E automatic terminals With shutters for child protection ○ White ● Grey ○ White antimicrobial
1	0 695 48	Emergency stop with key for reset - N/O + N/C contact Key RONIS n° 455 supplied Key removable in 0 position ● Grey/yellow	5	0 695 53	2P+E tamperproof-screw terminals ● Grey
1	0 695 49	Emergency stop - stay put 1/4 release - N/O + N/C contact Key removable in 0 position ● Grey/yellow	5	0 695 55	2P+E with flap-automatic terminals Automatic opening of the flap ● Grey
10	0 502 99	Tamperproof insert for Cat.No 0 695 53 Tamperproof insert for socket Fits directly into the plug			

Green'Up Access socket outlets for electric vehicles, p. 338

