



TERMINALS

PVC insulated ring terminals

Maximum electrical rating : 600 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Copper

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Hole (mm)	AWG	Length (mm)	Packing (pcs)
R 3.2 r	Red	0,5 ~ 1,5	3,2	22 ~ 16	16,7	100
R 3.7 r	Red	0,5 ~ 1,5	3,7	22 ~ 16	19,6	100
R 4.3 r	Red	0,5 ~ 1,5	4,3	22 ~ 16	19,6	100
R 5.3 r	Red	0,5 ~ 1,5	5,3	22 ~ 16	21,0	100
R 6.4 r	Red	0,5 ~ 1,5	6,5	22 ~ 16	26,8	100
R 8.4 r	Red	0,5 ~ 1,5	8,4	22 ~ 16	26,8	100
R 10.5 r	Red	0,5 ~ 1,5	10,5	22 ~ 16	30,7	100
R 3.7 b	Blue	1,5 ~ 2,5	3,7	16 ~ 14	19,5	100
R 4.3 b	Blue	1,5 ~ 2,5	4,3	16 ~ 14	22,0	100
R 5.3 b	Blue	1,5 ~ 2,5	5,3	16 ~ 14	22,0	100
R 6.4 b	Blue	1,5 ~ 2,5	6,5	16 ~ 14	27,0	100
R 8.4 b	Blue	1,5 ~ 2,5	8,4	16 ~ 14	27,0	100
R 10.5 b	Blue	1,5 ~ 2,5	10,5	16 ~ 14	30,7	100
R 3.2 g	Yellow	4,0 ~ 6,0	3,2	12 ~ 10	22,0	100
R 4.3 g	Yellow	4,0 ~ 6,0	4,3	12 ~ 10	25,5	100
R 5.3 g	Yellow	4,0 ~ 6,0	5,3	12 ~ 10	25,5	100
R 6.4 g	Yellow	4,0 ~ 6,0	6,5	12 ~ 10	29,0	100
R 8.4 g	Yellow	4,0 ~ 6,0	8,4	12 ~ 10	33,7	100
R 10.5 g	Yellow	4,0 ~ 6,0	10,5	12 ~ 10	33,7	100

PVC insulated spade terminals

Maximum electrical rating : 600 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Copper

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Groove (mm)	AWG	Length (mm)	Packing (pcs)
V 3.2 r	Red	0,5 ~ 1,5	3,2	22 ~ 16	21,0	100
V 3.7 r	Red	0,5 ~ 1,5	3,7	22 ~ 16	20,6	100
V 4.3 r	Red	0,5 ~ 1,5	4,3	22 ~ 16	20,6	100
V 5.3 r	Red	0,5 ~ 1,5	5,3	22 ~ 16	21,0	100
V 6.4 r	Red	0,5 ~ 1,5	6,5	22 ~ 16	27,2	100
V 3.7 b	Blue	1,5 ~ 2,5	3,7	16 ~ 14	21,0	100
V 4.3 b	Blue	1,5 ~ 2,5	4,3	16 ~ 14	21,0	100
V 5.3 b	Blue	1,5 ~ 2,5	5,3	16 ~ 14	22,0	100
V 6.4 b	Blue	1,5 ~ 2,5	6,5	16 ~ 14	27,2	100
V 8.4 b	Blue	1,5 ~ 2,5	8,4	16 ~ 14	27,2	100
V 3.7 g	Yellow	4,0 ~ 6,0	3,7	12 ~ 10	25,2	100
V 4.3 g	Yellow	4,0 ~ 6,0	4,3	12 ~ 10	25,2	100
V 5.3 g	Yellow	4,0 ~ 6,0	5,3	12 ~ 10	25,2	100
V 6.4 g	Yellow	4,0 ~ 6,0	6,5	12 ~ 10	31,2	100

PVC insulated female disconnectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Tab (mm)	AWG	Packing (pcs)
Con vh 2.8 rs	Red	0,5 ~ 1,5	0,5 * 2,8	22 ~ 16	100
Con vh 2.8 r	Red	0,5 ~ 1,5	0,8 * 2,8	22 ~ 16	100
Con vh 4.8 rs	Red	0,5 ~ 1,5	0,5 * 4,8	22 ~ 16	100
Con vh 4.8 r	Red	0,5 ~ 1,5	0,8 * 4,8	22 ~ 16	100
Con vh 6.3 r	Red	0,5 ~ 1,5	0,8 * 6,4	22 ~ 16	100
Con vh 2.8 bs	Blue	1,5 ~ 2,5	0,5 * 2,8	16 ~ 14	100
Con vh 2.8 b	Blue	1,5 ~ 2,5	0,8 * 2,8	16 ~ 14	100
Con vh 4.8 bs	Blue	1,5 ~ 2,5	0,5 * 4,8	16 ~ 14	100
Con vh 4.8 b	Blue	1,5 ~ 2,5	0,8 * 4,8	16 ~ 14	100
Con vh 6.3 b	Blue	1,5 ~ 2,5	0,8 * 6,4	16 ~ 14	100
Con vh 6.3 g	Yellow	4,0 ~ 6,0	0,8 * 6,8	12 ~ 10	100

PVC fully insulated female disconnectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Tab (mm)	AWG	Packing (pcs)
Con vv 2.8 rs	Red	0,5 ~ 1,5	0,5 * 2,8	22 ~ 16	100
Con vv 2.8 r	Red	0,5 ~ 1,5	0,8 * 2,8	22 ~ 16	100
Con vv 4.8 rs	Red	0,5 ~ 1,5	0,5 * 4,8	22 ~ 16	100
Con vv 4.8 r	Red	0,5 ~ 1,5	0,8 * 4,8	22 ~ 16	100
Con vv 6.3 r	Red	0,5 ~ 1,5	0,8 * 6,4	22 ~ 16	100
Con vv 2.8 bs	Blue	1,5 ~ 2,5	0,5 * 2,8	16 ~ 14	100
Con vv 2.8 b	Blue	1,5 ~ 2,5	0,8 * 2,8	16 ~ 14	100
Con vv 4.8 bs	Blue	1,5 ~ 2,5	0,5 * 4,8	16 ~ 14	100
Con vv 4.8 b	Blue	1,5 ~ 2,5	0,8 * 4,8	16 ~ 14	100
Con vv 6.3 b	Blue	1,5 ~ 2,5	0,8 * 6,4	16 ~ 14	100
Con vv 6.3 g	Yellow	4,0 ~ 6,0	0,8 * 6,4	12 ~ 10	100

PVC insulated piggy-back connectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Tab (mm)	AWG	Packing (pcs)
Con dh 6.3 r	Red	0,5 ~ 1,5	0,8 * 6,4	22 ~ 16	100
Con dh 6.3 b	Blue	1,5 ~ 2,5	0,8 * 6,4	16 ~ 14	100
Con dh 6.3 g	Yellow	4,0 ~ 6,0	0,8 * 6,4	12 ~ 10	100

PVC insulated butt connectors

Maximum electrical rating : 600 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Copper



Typenr.	Color	Wire range (mm ²)	Length (mm)	AWG	Packing (pcs)
Ver 1.25 r	Red	0,5 ~ 1,5	26,0	22 ~ 16	100
Ver 2 b	Blue	1,5 ~ 2,5	26,0	16 ~ 14	100
Ver 5.5 g	Yellow	4,0 ~ 6,0	26,0	12 ~ 10	100

PVC insulated male disconnectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Tab (mm)	AWG	Packing (pcs)
Con mh 2.8 rs	Red	0,5 ~ 1,5	0,5 * 2,8	22 ~ 16	100
Con mh 2.8 r	Red	0,5 ~ 1,5	0,8 * 2,8	22 ~ 16	100
Con mh 4.8 rs	Red	0,5 ~ 1,5	0,5 * 4,8	22 ~ 16	100
Con mh 4.8 r	Red	0,5 ~ 1,5	0,8 * 4,8	22 ~ 16	100
Con mh 6.3 r	Red	0,5 ~ 1,5	0,8 * 6,4	22 ~ 16	100
Con mh 2.8 bs	Blue	1,5 ~ 2,5	0,5 * 2,8	16 ~ 14	100
Con mh 2.8 b	Blue	1,5 ~ 2,5	0,8 * 2,8	16 ~ 14	100
Con mh 4.8 bs	Blue	1,5 ~ 2,5	0,5 * 4,8	16 ~ 14	100
Con mh 4.8 b	Blue	1,5 ~ 2,5	0,8 * 4,8	16 ~ 14	100
Con mh 6.3 b	Blue	1,5 ~ 2,5	0,8 * 6,4	16 ~ 14	100
Con mh 6.3 g	Yellow	4,0 ~ 6,0	0,8 * 6,4	12 ~ 10	100

Heat shrinkable butt connectors


Properties : 100% waterproof with heat shrinkable tubing
 Temperature range : -10 °C up to +105 °C
 Shrink temperature : +100 °C up to +200 °C
 Insulation material : Polyolefin
 Certification : RoHS



Typenr.	Color	Wire range (mm ²)	Length (mm)	AWG	Packing (pcs)
Ver 1.25 r heat shrink	Red	0,5 ~ 1,5	37,0	22 ~ 16	100
Ver 2 b heat shrink	Blue	1,5 ~ 2,5	37,0	16 ~ 14	100
Ver 5.5 g heat shrink	Yellow	4,0 ~ 6,0	41,0	12 ~ 10	100

Solder butt connectors

Temperature range : -55 °C up to +125 °C
 Shrink temperature : > +140 °C
 Insulation material : Polyolefin

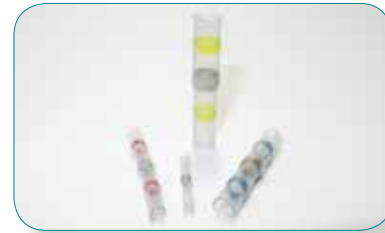

Typenr.	Color	Wire range (mm ²)	Length (mm)	Packing (pcs)
Solder 0.2 - 0.75 transp.	Transparent	0,2 ~ 0,75	40,0	100
Solder 0.6 - 2.0 red	Red	0,6 ~ 2,0	40,0	100
Solder 1.8 - 2.5 blue	Blue	1,8 ~ 2,5	40,0	100
Solder 2.4 - 4.5 yellow	Yellow	2,4 ~ 4,5	40,0	100

PVC fully insulated receptacle disconnectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Diameter connector (mm)	AWG	Packing (pcs)
Kog v 4 r	Red	0,5 ~ 1,5	4,0	22 ~ 16	100
Kog v 4 b	Blue	1,5 ~ 2,5	4,0	16 ~ 14	100
Kog v 5 b	Blue	1,5 ~ 2,5	5,0	16 ~ 14	100
Kog v 5 g	Yellow	4,0 ~ 6,0	5,0	12 ~ 10	100

PVC insulated bullet disconnectors

Maximum electrical rating : 300 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"



Typenr.	Color	Wire range (mm ²)	Diameter connector (mm)	AWG	Packing (pcs)
Kog m 4 r	Red	0,5 ~ 1,5	4,0	22 ~ 16	100
Kog m 4 b	Blue	1,5 ~ 2,5	4,0	16 ~ 14	100
Kog m 5 b	Blue	1,5 ~ 2,5	5,0	16 ~ 14	100
Kog m 5 g	Yellow	4,0 ~ 6,0	5,0	12 ~ 10	100

PVC insulated pin terminals

Maximum electrical rating : 600 V max.
 Maximum temperature : 75 °C
 Insulation material : PVC
 Terminal material : Brass

Also available without sleeve and with "easy entry"




Typenr.	Color	Wire range (mm ²)	AWG	Length (mm)	Packing (pcs)
Pin r	Red	0,5 ~ 1,5	22 ~ 16	22,5	100
Pin b	Blue	1,5 ~ 2,5	16 ~ 14	22,5	100
Pin g	Yellow	4,0 ~ 6,0	12 ~ 10	26,2	100

Non insulated DIN 46234 terminals

Material : Copper
 Certification : DIN 46234

On request: 95 mm², 120 mm², 150 mm², 185 mm² and 240 mm²

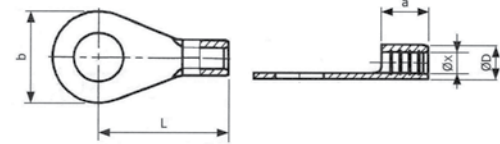

¹ = Does not meet the DIN standards



Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	b (mm)	L (mm)	a (mm)	Packing (pcs)
PKQ 15.03	0,5 ~ 1,5	22 ~ 16	3,0	1,6	3,2	6,0	11,0	5,0	100
PKQ 15.04	0,5 ~ 1,5	22 ~ 16	4,0	1,6	3,2	8,0	12,0	5,0	100
PKQ 15.05	0,5 ~ 1,5	22 ~ 16	5,0	1,6	3,2	10,0	13,0	5,0	100
PKQ 15.06 ¹	0,5 ~ 1,5	22 ~ 16	6,0	1,6	3,2	10,0	13,0	5,0	100
PKQ 15.08 ¹	0,5 ~ 1,5	22 ~ 16	8,0	1,6	3,2	14,0	17,0	5,0	100
PKQ 15.10 ¹	0,5 ~ 1,5	22 ~ 16	10,0	1,6	3,2	14,0	17,0	5,0	100
PKQ 25.03	1,5 ~ 2,5	16 ~ 14	3,0	2,3	3,9	6,0	11,0	5,0	100
PKQ 25.04	1,5 ~ 2,5	16 ~ 14	4,0	2,3	3,9	8,0	12,0	5,0	100
PKQ 25.05	1,5 ~ 2,5	16 ~ 14	5,0	2,3	3,9	10,0	14,0	5,0	100
PKQ 25.06	1,5 ~ 2,5	16 ~ 14	6,0	2,3	3,9	11,0	16,0	5,0	100
PKQ 25.08	1,5 ~ 2,5	16 ~ 14	8,0	2,3	3,9	14,0	17,0	5,0	100
PKQ 25.10 ¹	1,5 ~ 2,5	16 ~ 14	10,0	2,3	3,9	18,0	18,0	5,0	100
PKQ 25.12 ¹	1,5 ~ 2,5	16 ~ 14	12,0	2,3	3,9	18,0	18,0	5,0	100
PKQ 60.04	4,0 ~ 6,0	12 ~ 10	4,0	3,6	5,6	8,0	14,0	6,0	100
PKQ 60.05	4,0 ~ 6,0	12 ~ 10	5,0	3,6	5,6	10,0	15,0	6,0	100
PKQ 60.06	4,0 ~ 6,0	12 ~ 10	6,0	3,6	5,6	11,0	16,0	6,0	100
PKQ 60.08	4,0 ~ 6,0	12 ~ 10	8,0	3,6	5,6	14,0	19,0	6,0	100
PKQ 60.10	4,0 ~ 6,0	12 ~ 10	10,0	3,6	5,6	18,0	21,0	6,0	100
PKQ 60.12 ¹	4,0 ~ 6,0	12 ~ 10	12,0	3,6	5,6	18,0	21,0	6,0	100
PKQ 100.05	10,0	8	5,0	4,5	6,7	10,0	16,0	8,0	100
PKQ 100.06	10,0	8	6,0	4,5	6,7	11,0	17,0	8,0	100
PKQ 100.08	10,0	8	8,0	4,5	6,7	14,0	20,0	8,0	100
PKQ 100.10	10,0	8	10,0	4,5	6,7	18,0	21,0	8,0	100
PKQ 100.12	10,0	8	12,0	4,5	6,7	22,0	23,0	8,0	100


Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	b (mm)	L (mm)	a (mm)	Packing (pcs)
PKQ 160.05	16,0	6	5,0	5,8	8,2	11,0	20,0	10,0	100
PKQ 160.06	16,0	6	6,0	5,8	8,2	11,0	20,0	10,0	100
PKQ 160.08	16,0	6	8,0	5,8	8,2	18,0	24,0	10,0	100
PKQ 160.10	16,0	6	10,0	5,8	8,2	18,0	24,0	10,0	100
PKQ 160.12	16,0	6	12,0	5,8	8,2	22,0	26,0	10,0	100
PKQ 250.05	25,0	4	5,0	7,5	10,5	12,0	25,0	11,0	100
PKQ 250.06	25,0	4	6,0	7,5	10,5	12,0	25,0	11,0	100
PKQ 250.08	25,0	4	8,0	7,5	10,5	16,0	25,0	11,0	100
PKQ 250.10	25,0	4	10,0	7,5	10,5	18,0	26,0	11,0	100
PKQ 250.12	25,0	4	12,0	7,5	10,5	22,0	31,0	11,0	100
PKQ 250.16	25,0	4	16,0	7,5	10,5	28,0	35,0	11,0	100
PKQ 350.06	35,0	2	6,0	9,0	12,2	15,0	26,0	12,0	100
PKQ 350.08	35,0	2	8,0	9,0	12,2	16,0	26,0	12,0	100
PKQ 350.10	35,0	2	10,0	9,0	12,2	18,0	27,0	12,0	100
PKQ 350.12	35,0	2	12,0	9,0	12,2	22,0	31,0	12,0	100
PKQ 350.16	35,0	2	16,0	9,0	12,2	28,0	36,0	12,0	100
PKQ 500.06	50,0	1/0	6,0	11,0	14,6	18,0	34,0	16,0	100
PKQ 500.08	50,0	1/0	8,0	11,0	14,6	18,0	34,0	16,0	100
PKQ 500.10	50,0	1/0	10,0	11,0	14,6	18,0	34,0	16,0	100
PKQ 500.12	50,0	1/0	12,0	11,0	14,6	22,0	36,0	16,0	100
PKQ 500.16	50,0	1/0	16,0	11,0	14,6	28,0	40,0	16,0	100
PKQ 700.06	70,0	2/0	6,0	13,0	17,0	22,0	36,0	18,0	100
PKQ 700.08	70,0	2/0	8,0	13,0	17,0	22,0	38,0	18,0	100
PKQ 700.10	70,0	2/0	10,0	13,0	17,0	22,0	38,0	18,0	100
PKQ 700.12	70,0	2/0	12,0	13,0	17,0	22,0	38,0	18,0	100
PKQ 700.16	70,0	2/0	16,0	13,0	17,0	28,0	42,0	18,0	100

For other types, please see the following page

Non insulated terminals

Material : Copper

On request: 185 mm², 240 mm² and 300 mm²



Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	a (mm)	l (mm)	b (mm)	Packing (pcs)
PKK 60.05	6,0	10	5,0	3,6	5,6	9,0	21,0	11,5	100
PKK 60.06	6,0	10	6,0	3,6	5,6	9,0	21,0	11,5	100
PKK 60.08	6,0	10	8,0	3,6	5,6	9,0	23,0	13,0	100
PKK 60.10	6,0	10	10,0	3,6	5,6	9,0	25,0	16,0	100
PKK 60.12	6,0	10	12,0	3,6	5,6	9,0	25,0	19,0	100
PKK 100.05	10,0	8	5,0	4,5	7,0	10,0	21,0	12,0	100
PKK 100.06	10,0	8	6,0	4,5	7,0	10,0	21,5	12,0	100
PKK 100.08	10,0	8	8,0	4,5	7,0	10,0	23,5	15,0	100
PKK 100.10	10,0	8	10,0	4,5	7,0	10,0	25,5	17,0	100
PKK 160.05	16,0	6	5,0	5,5	8,5	13,0	25,0	12,0	100
PKK 160.06	16,0	6	6,0	5,5	8,5	13,0	25,5	12,0	100
PKK 160.08	16,0	6	8,0	5,5	8,5	13,0	27,5	15,0	100
PKK 160.10	16,0	6	10,0	5,5	8,5	13,0	29,5	17,0	100
PKK 160.12	16,0	6	12,0	5,5	8,5	13,0	30,5	19,0	100
PKK 250.05	25,0	4	5,0	7,2	10,0	15,0	28,0	14,0	100
PKK 250.06	25,0	4	6,0	7,2	10,0	15,0	28,5	14,0	100
PKK 250.08	25,0	4	8,0	7,2	10,0	15,0	30,5	16,0	100
PKK 250.10	25,0	4	10,0	7,2	10,0	15,0	32,5	18,0	100
PKK 250.12	25,0	4	12,0	7,2	10,0	15,0	33,5	19,0	100
PKK 350.06	35,0	2	6,0	8,5	12,0	17,0	31,5	18,0	25
PKK 350.08	35,0	2	8,0	8,5	12,0	17,0	33,5	18,0	25
PKK 350.10	35,0	2	10,0	8,5	12,0	17,0	35,5	18,0	25
PKK 350.12	35,0	2	12,0	8,5	12,0	17,0	36,5	20,0	25

Typenr.	Wire range (mm ²)	AWG	Hole diameter (mm)	X (mm)	D (mm)	a (mm)	l (mm)	b (mm)	Packing (pcs)
PKK 500.06	50,0	1/0	6,0	10,2	14,0	19,0	34,5	20,0	25
PKK 500.08	50,0	1/0	8,0	10,2	14,0	19,0	36,5	20,0	25
PKK 500.10	50,0	1/0	10,0	10,2	14,0	19,0	38,5	20,0	25
PKK 500.12	50,0	1/0	12,0	10,2	14,0	19,0	39,5	23,0	25
PKK 500.16	50,0	1/0	16,0	10,2	14,0	19,0	42,5	28,0	25
PKK 700.06	70,0	2/0	6,0	12,0	16,5	21,0	40,5	23,0	25
PKK 700.08	70,0	2/0	8,0	12,0	16,5	21,0	40,5	23,0	25
PKK 700.10	70,0	2/0	10,0	12,0	16,5	21,0	43,5	23,0	25
PKK 700.12	70,0	2/0	12,0	12,0	16,5	21,0	43,5	23,0	25
PKK 700.14	70,0	2/0	14,0	12,0	16,5	21,0	46,5	28,0	25
PKK 700.16	70,0	2/0	16,0	12,0	16,5	21,0	46,5	28,0	25
PKK 950.08	95,0	3/0	8,0	13,5	17,8	24,0	47,0	25,0	25
PKK 950.10	95,0	3/0	10,0	13,5	17,8	24,0	47,0	25,0	25
PKK 950.12	95,0	3/0	12,0	13,5	17,8	24,0	47,0	25,0	25
PKK 950.14	95,0	3/0	14,0	13,5	17,8	24,0	50,0	25,0	25
PKK 950.16	95,0	3/0	16,0	13,5	17,8	24,0	50,0	29,0	25
PKK 1200.08	120,0	4/0	8,0	15,0	19,5	26,0	50,0	29,0	25
PKK 1200.10	120,0	4/0	10,0	15,0	19,5	26,0	50,0	29,0	25
PKK 1200.12	120,0	4/0	12,0	15,0	19,5	26,0	50,0	29,0	25
PKK 1200.14	120,0	4/0	14,0	15,0	19,5	26,0	53,0	29,0	25
PKK 1200.16	120,0	4/0	16,0	15,0	19,5	26,0	53,0	29,0	25
PKK 1200.20	120,0	4/0	20,0	15,0	19,5	26,0	57,5	35,0	25
PKK 1500.10	150,0	5/0	10,0	16,5	20,8	29,0	54,0	31,0	25
PKK 1500.12	150,0	5/0	12,0	16,5	20,8	29,0	54,0	31,0	25
PKK 1500.16	150,0	5/0	16,0	16,5	20,8	29,0	57,0	31,0	25
PKK 1500.20	150,0	5/0	20,0	16,5	20,8	29,0	61,5	35,0	25

For other types, please see the following page

Quick splice connectors single tab

Maximum electrical rating : 600 V max.
 Maximum temperature : 105 °C
 Insulation material : Nylon
 Terminal material : Brass



Typenr.	Color	Wire range (mm ²)	AWG	Length (mm)	Packing (pcs)
Quick r	Red	0,5 ~ 1,5	22 ~ 16	26,0	100
Quick b	Blue	1,5 ~ 2,5	16 ~ 14	26,0	100
Quick g	Yellow	4,0 ~ 6,0	12 ~ 10	32,8	100

Fuseholders

Maximum electrical rating : 600 V max.
 Maximum temperature : 75 °C
 Insulation material : Polypropylene
 Terminal material : Brass



Typenr.	Color	Wire range (mm ²)	AWG	Length (mm)	Packing (pcs)
WK/2 fuse holder	Blue	1,5 ~ 2,5	16 ~ 14	34,0	200

Tool 4 for terminals

Type : Tool T4 KS insulated 0,5 – 6,0 mm²
 Material : Carbon steel
 Use : For insulated terminals of 0,5 – 6,0 mm²
 : Release of the tool when reaching the right pressure



Tool 5 for terminals

Type : Tool T5 KS insulated 0,5 – 6,0 mm²
 Material : Steel 3 / 16
 Use : For insulated terminals of 0,5 – 6,0 mm²



Assortments terminals

Assortment 1: terminals with tool 5 (261 pcs)

Terminal material : Brass
 Insulation material : PVC
 Maximum temperature : 75 °C
 Maximum electrical rating : 300 V

Including:

Typenr.	Color	Quantity
Tool 5		1
Con vh 6.3 r	Red	25
Con vh 6.3 b	Blue	25
Con mh 6.3 r	Red	25
Con mh 6.3 b	Blue	25
Con dh 6.3 r	Red	25
Con dh 6.3 b	Blue	25
Ver 1.25 r	Red	25
Ver 2 b	Blue	25
R 5.3 r	Red	25
R 6.4 b	Blue	25
Quick r	Red	5
Quick b	Blue	5



Assortment 2: heat shrinkable terminals (110 pcs)

Terminal material : Brass
 Insulation material : Polyolefin
 Shrink temperature : +150 °C
 Temperature range : -10 °C up to +105 °C

Including:

Typenr.	Color	Quantity
Ver 1.25 r heat shrink	Red	20
Ver 2 b heat shrink	Blue	20
Ver 5.5 g heat shrink	Yellow	10
Con vh 6.3 r heat shrink	Red	10
Con vh 6.3 b heat shrink	Blue	10
Con mh 6.3 r heat shrink	Red	10
Con mh 6.3 b heat shrink	Blue	10
R 5.3 r heat shrink	Red	10
R 5.3 b heat shrink	Blue	10

